

# Cat. 6A Shielded Tool-Less Keystone Jack 180



## • SP-JK6A-01



### SPECIFICATION:

#### Material

RJ45 JACK:

Housing Zinc Die-Cast . Niquelado (UL 94-V2)

Contact Bracket: PBT+Glass Fiber

#### 2. RJ45 JACK CONTACT

Material: Phor Bronze witch nickel plated

Finish: 50 micro-inch Gold Plated on Plug contact area.


#### 3. IDC

PBT+Glass Fiber UL 94V-2

Terminal: Phosphor Bronze witch nickel plated.

#### 4. INSTALLATION

The simple toolless design allows for quick field installation and positioning

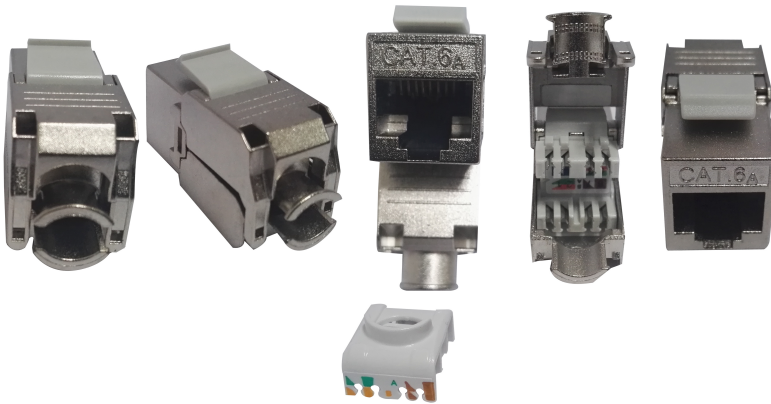

### PERFORMANCE:

A. T568A & T568B Wiring Sticker

B. Insertion Force: 20N max. (IEC 60603-7-4)

C. Retention Strength: 7.7 Kg between Jack and Plug

D. Operating Temperature: (ISO/IEC 11801, ANSI/TIA/EIA 568, B.2)

E. Life (Mating Cycles)

\* Jack: 750 cycles min (ISO/IEC 11081, IEC 60603-7-4)

\* IDC: Suitable for 23-26 AWG stranded and solid wire.

F. The Cat. 6A transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 Standard.

