


Cat. 5E Unshielded Tool-Less Keystone Jack 180



- SP-JK5E-01 / Black color
- SP-JK5E-02 / White color
- SP-JK5E-03 / Red color
- SP-JK5E-06 / Blue color

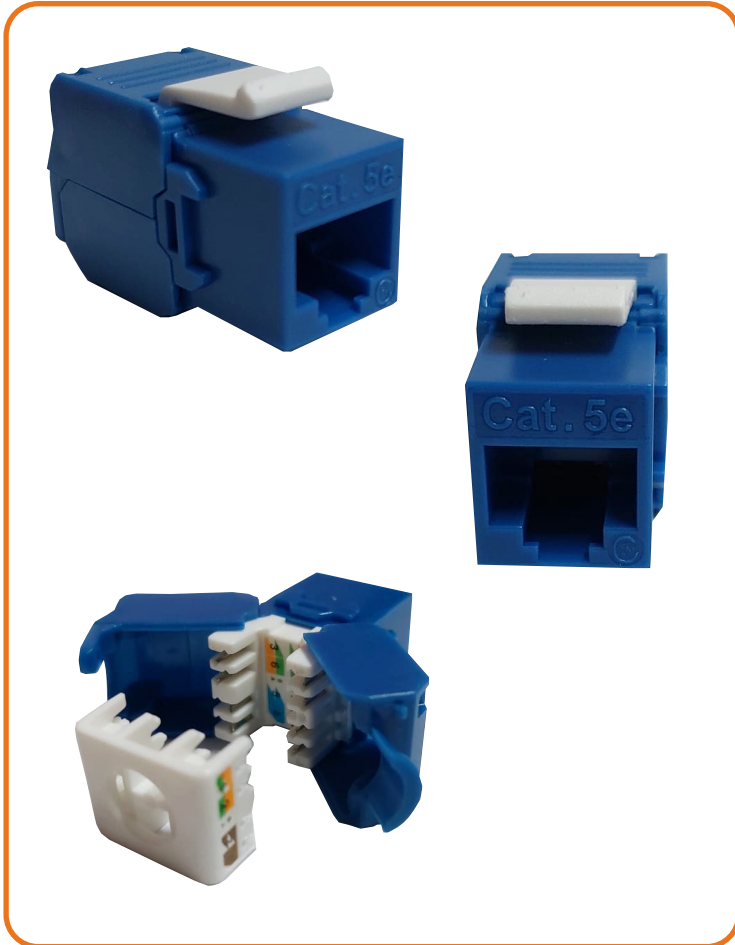

SPECIFICATION:

MECHANICAL SPECIFICATIONS

ISO/IEC11801: 2002

Jack insertion durability: ≥ 750 mating cycles

Plug & jack contact force: $\geq 100\text{g}$ with FCC approved plug

Plug retention force: $\geq 133\text{N}$

180 degree keystone Jack

ELECTRICAL SPECIFICATIONS:

Insulation resistance: $\geq 500\ \text{M}\Omega$

Contact resistance: $\geq 20\ \text{m}\Omega$

DC resistance: $\geq 0.1\ \Omega$

Current rating: $\geq 1.5\text{A}$

PERFORMANCE SPECIFICATIONS:

ISO/IEC11801: 2002 ANSI/TIA/EIA-568-B.2

PHYSICAL SPECIFICATIONS:

Housing: Flame retardant plastic, UL94V-0

RJ45, 8-position connector: Meets FCC part 68 and IEC 603-7

Connector wiring: 50u gold plating

IDC wire range: Solid or stranded, 22-26 AWG, 0.64mm -0.4mm

Operating temperature range: -10°C to 60°C

SUPPORTED APPLICATIONS:

Voice

ISDN: Basic & Primary Access

Token Ring: 4/16/100 Mbps

ATM: 25/52/155 Mbps

Ethernet: 10BASE-T; Fast Ethernet: 100BASE-TX/T2/T4; Gigabit Ethernet: 1000BASE-T

Broadband video

