


▪ SP-P24-5E

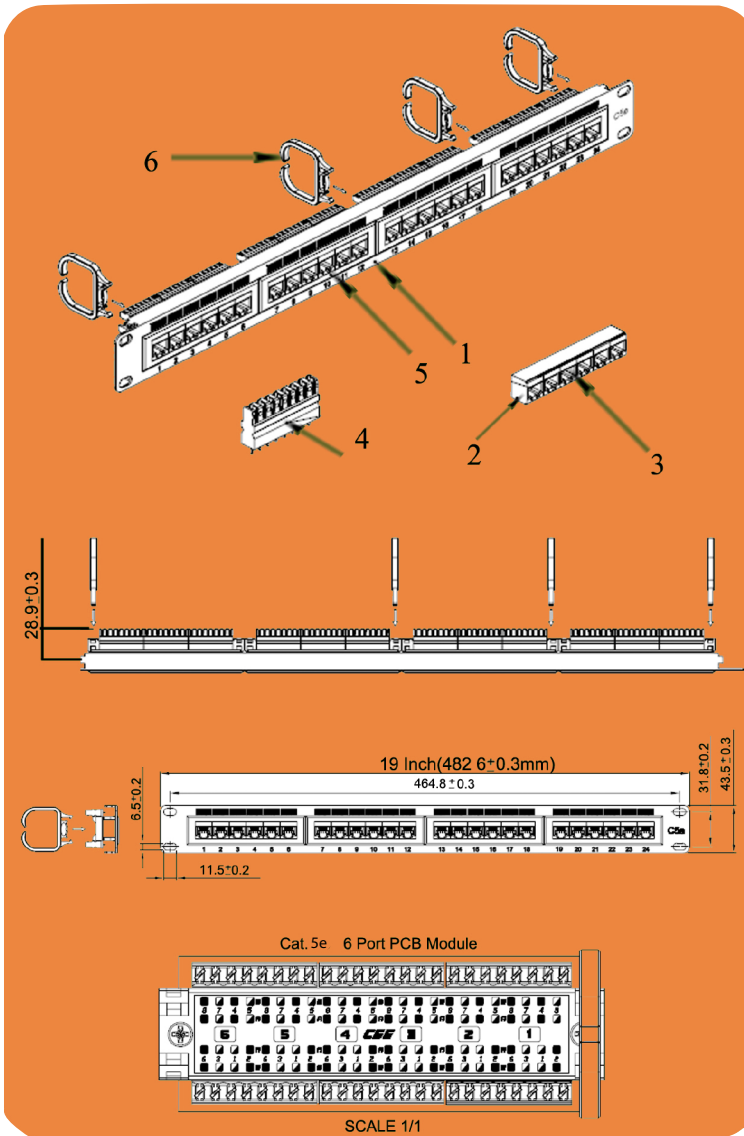

SPECIFICATION:

1. Panel

SPCC. 1.5mm thickness with black

2. RJ45 Jack

Housing; ABS, UL 94V-0
Contact Bracket: PC, UL 94V-2

3. RJ45 JACK

Material: Phor Bronze witch nickel plated

4. Jack Braket Set

ABS, UL 94V-0

5. Cable Holder

Nylon

6. PCB. FR4, UL 94V-0

Performance:

A. T568A & T568B Wiring

B. Insertion Force: 20N max.

C. Retention Strength: 7.7Kg Between Jack and Pug

D. Operating Tempe, rature: (ISO/IEC 11801,ANSI/TIA/EIA 568, B.2)

E. Life (Mating Cycles)

- Jack: 750 cycles min (ISO/IEC 11081, IEC 60603-7-4)

- IDC: Suitabkle for 22-26 AWG stranded and solid wire, compatible with borh 110 & Krone punch down tools.

F. The Cat5e transmission performance is in compliance with the ANSI/TIA/EIA 568 B.2 Standard)

