


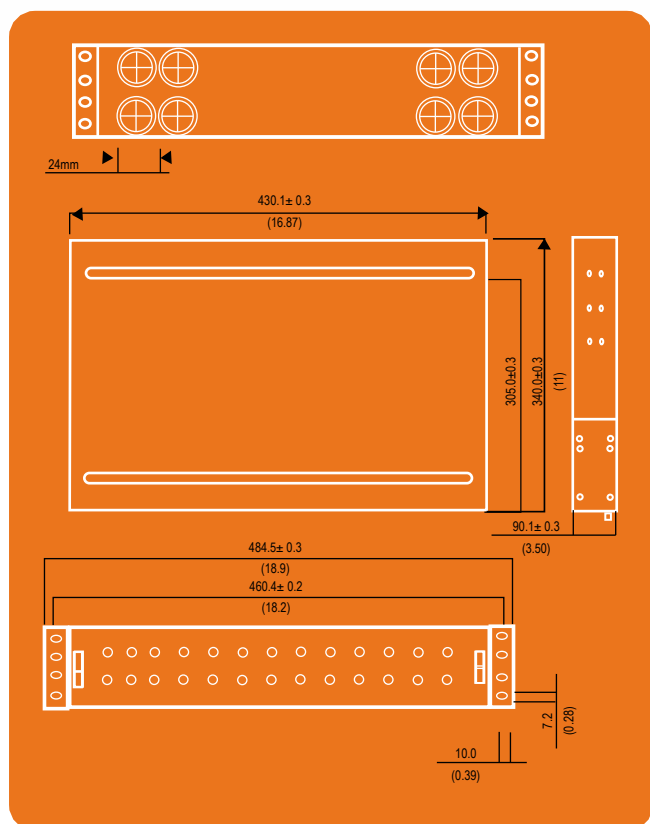

Comply with: ISO /IEC11801 and EN50173 Standards

1. - Mounted 19" design, fully sealed (2U)
2. - Metal structure, the use of high-quality high-strength cold-rolled steel, **surface with anti-static spraying treatment**, Appearance with **clean and beautiful surface**
- 3.- Design, with track, to facilitate the construction and future maintenance work
- 4.- New desing, can provide 12,24,48 FC, ST, SC, LC four interfaces, LC maximum support 96 port
- 5.- Ovide four fiber inlet, ensure the amount of incoming fiber,
- 6.- lque design of fiber splicing.
- 7.- Ovide empty bracket and bracket with couplers

Insertion life: 1000 times
Humidity: 10% to 90% RH
Applicable wire gauge: 22 24
Rated temperature: -20 7°C

W * H * D 19"(480mm) * 3.5" (90mm) * 13" (330mm)